



DUEVI
YOUR SECURITY. OUR TECHNOLOGY

KAPTURE-R
CURTAIN OUTDOOR SENSOR DOUBLE TECHNOLOGY WITH ANTIMASK

INSTALLATION AND USE MANUAL

19.01-M:1.0-H:SE-01V4-18-F:1.X

KAPTURE is a dual technology curtain sensor designed to protect access (such as doors, windows, etc.), balconies, and walls. KAPTURE is able to create an electronic wall which, if it is crossed, generates an alarm. The detection is entrusted to a passive infrared sensor and a 24 GHz microwave. The combination of these two technologies, together with a sophisticated detection algorithm, allows to discriminate improperly alarms with care. Equipped with anti-opening tamper, inclinometer and anti-masking, it is supplied with a practical wall bracket.

KAPTURE supports the innovative Wireless Walk Test and Programming System, composed of the VIEW SENSOR software and the mod. BT-LINK-S (supplied separately). The sensor adapts to environmental conditions thanks to a sophisticated thermal compensation system.


READ CAREFULLY THIS MANUAL BEFORE INSTALL YOUR NEW ALARM SYSTEM. KEEP THIS MANUAL FOR FUTURE REFERENCE.

ONLY QUALIFIED TECHNICIAN MUST INSTALL THIS DEVICE. INSTALLER MUST FOLLOW CURRENT REGULATIONS.


THE MANUFACTURER SHALL NOT BE LIABLE FOR ANY IMPROPER USE OF THE PRODUCT, INCORRECT INSTALLATION OR FAILURE TO COMPLY WITH INSTRUCTIONS OF THIS MANUAL AND THE LAW REGARDING ELECTRICAL SYSTEMS.

DETECTION AREA

TOP VIEW
The sensor detects over an area with a maximum length of **12 m** and a width of **7.5 °** (Fig. A)

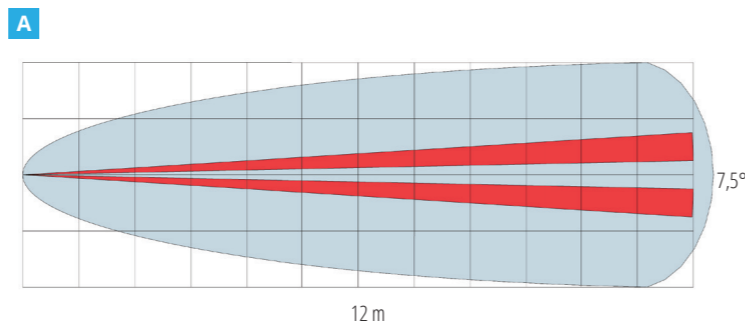


SIDE VIEW (installation at 2.2m high) (Fig. B)

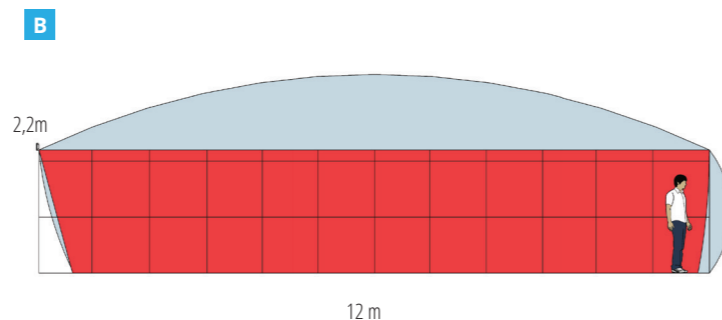

To change the detection area, change the inclination of the sensor and adjust the microwave and infrared ranges.

SIDE VIEW (installation at 3m height with inclined sensor) (fig C)

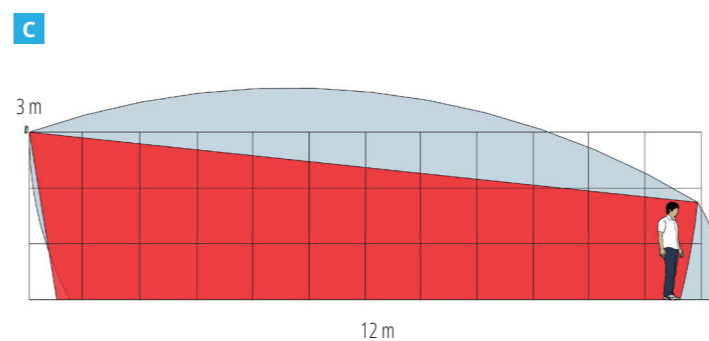


Mount the sensor vertically, without inclination to ensure maximum detection range, incline the sensor to delimit the coverage area.

The detection zone may vary depending on the surrounding setting. Prefer installations where there is a wall or floor to delimit the detection field of the sensor, so do not point the sensor in a vacuum. If this is not possible, prefer installation with a tilted sensor to delimit the sensor protection field.


INSTALLATION POSITION

The sensor can be installed directly on the wall or through the special L-shaped bracket. When the sensor is installed on the wall it is recommended to distance it from the wall to be protected so as not to obscure a sensitive element of the pyroelectric. Mount the sensor at a suitable distance from the wall as shown in figure E.

WRONG WALL INSTALLATION

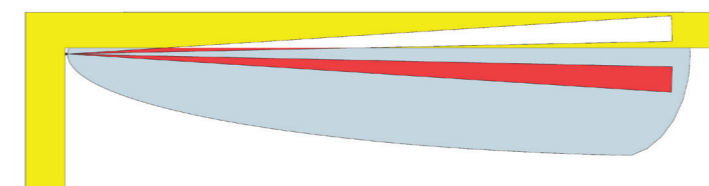

RIGHT WALL INSTALLATION

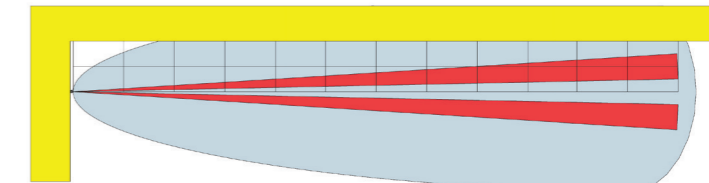


Position the sensor spaced from the wall following the rule:


- from 0 to 3 meters: mount the sensor about 20 cm from the wall
- from 3 to 6 meters: mount the sensor about 40 cm from the wall
- from 6 to 9 meters: mount the sensor about 60 cm from the wall
- from 9 to 12 meters: mount the sensor about 80 cm from the wall

The wall-mounting bracket is angled to ensure correct installation (fig.F)

INSTALLATION WITH BRACKET

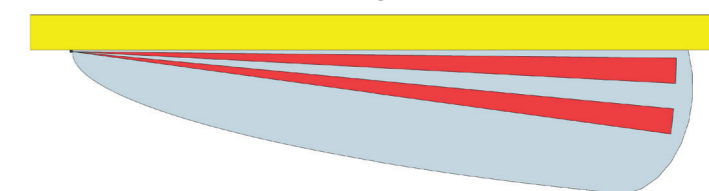

INSTALLATION WITH BRACKET

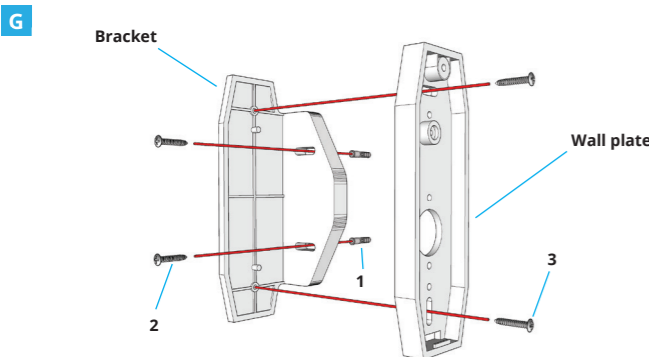

After defining the installation position of the sensor, install the L-shaped bracket following the indicated steps:

- make holes for fixing anchors (fig. G1)
- screw the bracket to the plugs (fig. G2)
- screw the wall plate to the bracket (fig. G3)
- screw the sensor to the wall plate (see next paragraph)

The bracket is characterized by tilting holes to allow the adjustment of the inclination of the sensor even after fixing.

To change the inclination of the sensor:

- loosen the screws (fig. G2)
- tilt the sensor
- tighten the screws (fig. G2)

Legend:


- G1) Fischer anchors 6mm (2pcs)
- G2) Milled head screw 3.5x40 mm (2pcs)
- G3) Cylindrical head screw 3.5x9.5 (2pcs)

INSTALLATION WITH WALL PLATE

- To install the sensor with the wall base, perform the following steps:
- make the holes for the fixing blocks (Fig. H1)
 - screw the wall base to the wall plugs (Fig. H2, H3)
 - screw the sensor bottom plug to the wall base (H4)
 - close and tighten the sensor cover (Fig. H5)

WARNING! IT IS COMPULSORY TO MOUNT THE SCREW IN FIGURE H4 TO GUARANTEE THE CORRECT OPERATION OF THE SENSOR. THE H4 SCREW HAS ANTI-RIPPER FUNCTION AND PREVENTS WATER INLET IN THE SENSOR.

SENSOR PARTS

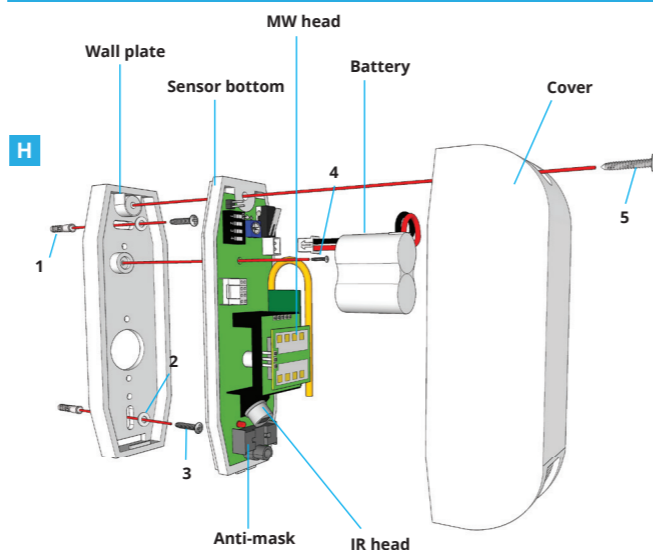

Legend:


- H1) Fischer anchors 6mm (2pcs)
- H2) Washer 4 hole diameter 9 (2pcs)
- H3) Milled head screw 3.5x40 mm (2pcs)
- H4) Milled head screw 2.5x16 mm (1pc)
- H5) Screw M 3x45

TECHNICAL

| | KAPTURE-R |
|--|--|
| Power supply | Lithium batteries pack 6 V |
| Absorption * | Stand-by: about 13 uA Alarm: about 4 mA |
| Autonomy (estimated) ** | About 2 years |
| Stabilization Time (at power-up) | About 2 minutes (with LED blink) |
| Quiet Time between detections | About 30 seconds |
| Detection technologies | n. 1 Infrared head n. 1 Pulsed microwave @ 24 GHz head |
| Thermal compensation | Automatic compensation |
| - | - |
| - | - |
| Detection area* | Max 12 linear meters (adjustable: 3 m + 12 m) 7,5 ° radial opening (IR) 30 ° radial opening (MW) |
| IR head adjustment | Orientation completely independent (vertically and horizontally) |
| Sensitivity | Independent for each head (trimmers) from 30% (min) to 100 % (max) |
| Radio frequency / range | - |
| Anti-masking | Active infrared |
| Radio signals | Alarm Tamper Masking Low Battery |
| - | - |
| LEDs | 1 red LED (upper, IR head detection) 1 red LED (lower, MW head detection) 1 blue alarm LED |
| Temperature / Humidity | -40 ÷ +70 °C / 95 % (relative) |
| Case / IP degree / IK degree | ABS antiUV |
| Dimension (H x W x D) / Weight | - |
| Internal space for transmitter (H x W x D) | - |
| Accessories included | n. 1 L Bracket |

* All the data are approximate, for sensor in NORMAL mode at operating temperature of 21 °C.
** Mean value for 10 detections-alarms/day + supervision.

COMPONENT DIAGRAM

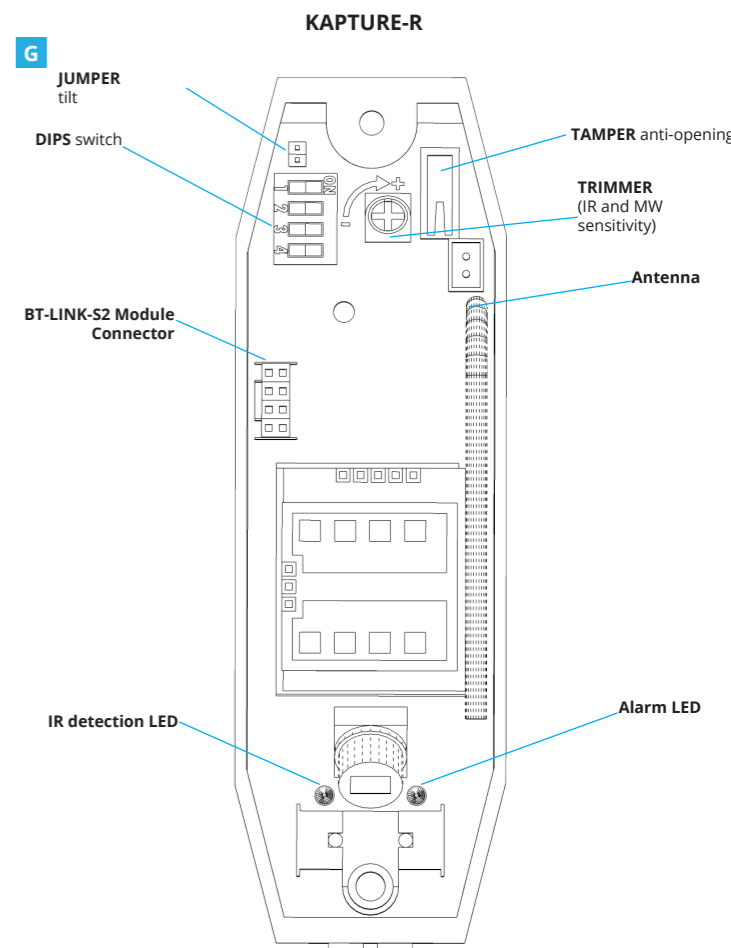

BATTERY

LOW BATTERY

When the battery is low, the sensor activates the LWB output. The battery level is visible via the VIEW SENSOR app.

BATTERY REPLACEMENT

- Disconnect the dead battery
- Press the tamper for about 3 seconds (circuit discharge)
- Connect the new battery

CAUTION

DANGER OF EXPLOSION IF THE BATTERY IS REPLACED WITH ANOTHER TYPE. DISPOSE OF USED BATTERIES FOLLOWING THE INSTRUCTIONS.

THE ESTIMATED DURATION OF THE BATTERY OF THE SENSOR IS PROPORTIONAL TO:

- THERMAL CYCLE OF HEATING AND COOLING THE BATTERY THAT ALTER THE CAPACITY AND AUTONOMY OF THE CHARGE
- WORKING TEMPERATURE TO WHICH THE BATTERY OPERATES (EX.: AT TEMPERATURES LOWER THAN 0 ° C THE DURATION OF THE BATTERY CAN REDUCE UP TO 50%)
- NUMBER OF SENSOR DETECTIONS: IF THE SENSOR IS INSTALLED IN HIGH FREQUENCY PASSAGE ZONES, THE BATTERY AUTONOMY IS DRASTICALLY REDUCED

INSTALLATION (WHAT TO KNOW ABOUT)

THE SENSOR WORKS ONLY WITH THE COVER ON ITS PLACE !

AFTER EACH CHANGE TO DIP AND TRIMMER:

- (MANDATORY) PLACE THE COVER TO PERFORM TESTS
- WAIT AT LEAST 3 SECONDS (THE SENSOR READS NEW SETTINGS)

- The sensor has a IP54 protection level against dust and liquids. To maintain the IP54 level it is mandatory to insert the o-rings provided. If possible, it is suggested to install the sensor protected against weathering: do not point high pressure water jets to the sensor.
- Infrared detector is sensitive to the "amount of heat" produced by a moving body. The maximum range of the sensor (measured in meters) is referred to a human body. However the same "amount of heat" may be produced by a smaller body at lower distances (dog), or by a larger one at greater distances (vehicle).



- Do not point the sensor towards unstable objects, such as: bushes, flags, tree branches, clothes hung, etc. This avoid unwanted detections.
- During adjustment, perform several detection tests to verify the correct working of the sensor. For best IR "sensitivity" adjustment, start setting the sensitivity to minimum (turn completely counter-clockwise the trimmers) and point the sensor downwards. Gradually increase the sensitivity and change the sensor orientation until obtain detection only inside the wanted area.
- The sensor may detect pets over 10Kg.

Avoid the presence of oscillating objects (such as tree fronds) also behind the sensor. In fact, the microwave can also be sensitive to movements that occur behind the sensor within a radius of about one meter, depending on the sensitivity set.

POWER ON

If the sensor is already powered, before proceeding it is necessary to switch off the power supply and keep the anti-removal tamper pressed for about 3 seconds: in this way the circuit is completely discharged and the sensor can be started correctly. Supply the sensor: the sensor enters the "initialization" phase. The detection LEDs flash alternately for 30 seconds. It is important to leave the sensor "at rest" (no detection). At the end of the stabilization the LEDs turn off and the sensor can be used. To reset the sensor, disconnect the power supply and repeat the procedure described above.

9

10

ACTIVE ALARM LED IN NORMAL MODE

To activate the ALARM LED in normal operation:

- put **DIP1 = ON** and close the cover
- wait until the sensor exit automatically from walk-test (about 15 min): the sensor returns to NORMAL mode
- now the ALARM LED is active, signaling the alarm events that occur during the measurements

ATTENTION: THE SENSOR IS OPERATIVE ONLY WITH THE COVER! After each modification of the dials and trimmers it is necessary to close the cover and wait for at least 3 seconds during which the sensor reads the settings.

PROTECTION FROM TAMPER

The sensor is protected against tampering attempts by means of three controls: anti-opening of the cover, anti-removal and anti-masking.

ANTI-OPENING

Protection against opening of the sensor cover.

ANTI-REMOVAL

Protection against removal from the installation position.

Protection activated by the inclinometer on the sensor. Pay attention to the installation instructions to avoid inaccurate reporting

To exclude this protection act on the INCLINOMETER JUMPER:

- closed = Inclinometer active
- open = Inclinometer disabled.

SENSITIVITY

The sensitivity of the infrared and the microwave are regulated together by the trimmer. Turn the trimmer clockwise to increase the sensitivity. Active thermal compensation automatically adjusts the sensor to maximize yield in the most critical temperatures. To delimit the detection zone more precisely, it is advisable to mount the sensor with the correct inclination, in order to better define the detection area. Although the thermal compensation acts on the detection algorithm, adapting the behavior according to the detected temperature, the sensor can slightly alter the behavior according to the climatic conditions.

Note: The trimmer adjusts the sensitivity of the microwave, limiting its detection range with reasonable precision. The infrared range is automatically adjusted according to the range of the microwave, ensuring its activation even in the most unfavorable conditions without necessarily limiting the infrared range to the one of the microwave. Infra-red detection depends on many factors, such as environmental temperature, intruder clothing, climatic conditions, and it is not possible to have full control over the effective infrared range in all conditions. In some situations it will therefore be possible to have infrared detections at a distance greater than that established by the trimmer, without this compromising the reliability of the sensor which is guaranteed by the precision of detection of the microwave.

13

DIPS-SWITCH FUNCTIONS

To program the sensor, use the DIPS switches.

The functions of the DIPS are described in the following paragraphs.

WARNING! When DIP3 = ON the sensor configuration is done via VIEW SENSOR, then some DIPS are not working (see DIP3).

| | ON ← | OFF |
|--------------------|---------|----------|
| TYPE OF RADIO CODE | OLD | NEW |
| REMOTE PROGRAMMING | ENABLED | DISABLED |
| ANTIMASKING | ENABLED | DISABLED |
| WALK-TEST | ENABLED | DISABLED |

DIP 1 WALK-TEST

Through the DIP 1, the WALK-TEST is enabled on both heads for orientation and range adjustments. The sensor automatically exits from any WALK-TEST mode after approximately 15 minutes. During the WALK-TEST there are luminous signals to facilitate the operation; in NORMAL mode no signal is emitted, unless the alarm LED is activated (see "ACTIVE ALARM LED IN NORMAL MODE")

- DIP1 = ON** Walk test activated
- DIP1 = OFF** Walk test disabled, sensor in NORMAL MODE

Through VIEW SENSOR it is possible to easily execute a much more precise WALK-TEST, which allows to optimally configure the sensor.

DIP2 - ANTI-MASKING

The anti-masking device protects the sensor 24/24 in case an attacker wants to blind the sensor by covering it so as to prevent detection. Anti-masking does not work without the cover on the sensor.

- DIP2 = OFF** Anti-masking disabled: no anti-masking protection
- DIP2 = ON** Anti-masking enabled: you have an alarm mask when you cover the sensor in order to avoid detections.

he MASK alarm is activated if masking persists for more than one minute. Following the MASK alarm, the sensor returns to rest even if it remains masked. The anti-masking protection is always active (when enabled with **DIP2 = ON**) even when the central panel is switched off. Respect an area of approximately 30 cm in front of the sensor in which people must not stand more than a minute. Also, do not leave open doors, loose clothing or furniture items near the sensor. The anti-masking function is active with ambient temperature above 0 ° C.

Through VIEW-SENSOR it is possible to extend the operating temperature of the anti-masking to values lower than 0 ° C.

11

ADDITIONAL FUNCTIONALITIES (ONLY THROUGH VIEW SENSOR)


ANTIDISTURBANCE

This function increases the immunity to false alarms in particularly harsh outdoor environments, disturbed by sudden light reflections, changes in exposure to the sun, unstable objects (eg tree fronds, flat linen, etc...). This setting can only be activated with VIEW SENSOR, with four different levels of intensity

INFRARED AND MICROWAVE INDEPENDENT ADJUSTMENT

Through VIEW SENSOR it is possible to calibrate the infrared and the microwave independently to obtain the maximum installation flexibility. For example, to increase the detected passage speed, it is possible to increase the sensitivity of the pyroelectric device, delimiting the sensor range with the microwave. It is important to remember that it is always a good idea to keep the pyroelectric more sensitive than the microwave, to always ensure correct detection in the area to be protected.


Example of a mobile screen during the walk-test

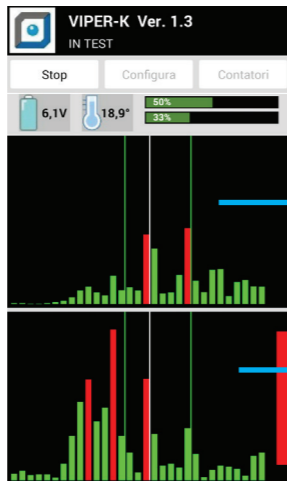

Signal level at the upper head

Signal level at the lower head

Example of a mobile screen during configuration

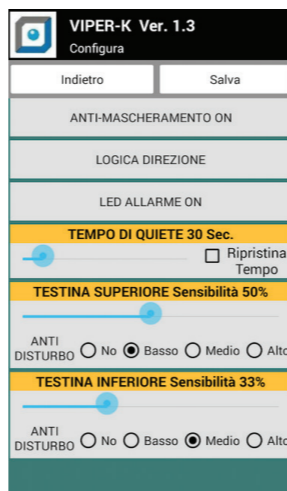

14

DIP3 - REMOTE PROGRAMMING

Select whether the sensor uses the hardware settings (trimmers and DIPS) when in OFF, or those sent by VIEW SENSOR when in ON.

- DIP3 = ON REMOTE PROGRAMMING ENABLED** enables remote sensor programming via the VIEW SENSOR application available for mobile devices. This option provides greater flexibility in setting sensor parameters and allows real-time verification of changes to settings. For remote programming, the BT-LINK-S accessory, supplied separately, is required. With **DIP3** in the **ON** position the **DIP2** and the trimmer is deactivated because their functions are set via VIEW SENSOR. **DIPS 1 - 4** remain active. After memorizing a configuration using VIEW SENSOR, **DIP3** must remain **ON**, even after the WALK-TEST has ended. **If you place DIP3 in ON but you have not loaded a configuration via VIEW SENSOR, the sensor will use the hardware configuration**

- DIP3 = OFF REMOTE PROGRAMMING DISABLED** the sensor configuration is done by DIPS and trimmers. This manual mainly explains the HARDWARE settings (via DIPS, trimmers and jumpers), for information on remote programming refer to the BT-LINK-S module manual and the VIEW SENSOR app.

ONCE USED SOFTWARE CONFIGURATION, LEAVE THE DIP7 = ON, OTHERWISE THE SENSOR RETURNS TO THE MANUAL SETTINGS

IF YOU DO NOT USE THE SOFTWARE CONFIGURATION SYSTEM, ALWAYS LEAVE THE DIP7 IN THE OFF POSITION

DIP4 - TYPE OF RADIO CODES

The sensor transmits a special anti-masking alarm code, some old central panel may not recognize this code; in this case setting the DIP4 to ON the sensor transmits a TAMPER code when anti-masking occurs, in order to guarantee backward compatibility.

- DIP4 = ON** The sensor transmits the TAMPER code in case of anti-masking.
- DIP4 = OFF** The sensor transmits codes for new generation central panel that recognize anti-masking.

The control units and receivers that surely handle the anti-masking alarm are the following:

| Central panel "NEW" | Receiver "NEW" |
|---------------------------------------|----------------|
| CE60-3GSM firmware 4.30 or upper | RX808-LCD |
| CE60-8GSM | |
| CE100-3GSM BUS firmware 1.40 or upper | |
| CE30 firmware 4.30 or upper | |

If in doubt or if the anti-masking reception in the central panel is not received, position DIP8 on ON.

12

DUEVI s.r.l. - Via Bard 12/A, 10142 TORINO - ITALY
Made in Italy
Il presente manuale può essere soggetto a modifiche senza preavviso

Ai sensi del D.LGS N° 49 del 14 marzo 2014 "Attuazione della Direttiva 2012/19/UE sui rifiuti di apparecchiature elettriche ed elettroniche (RAEE)". Il simbolo del cassonetto barrato riportato sull'apparecchiatura indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti e conferito presso idonei centri di raccolta differenziata dei rifiuti elettronici ed elettrotecnici. Lo smaltimento abusivo del prodotto da parte dell'utente comporta l'applicazione delle sanzioni amministrative di cui al D.LGS n. 49 del 14/03/2014.

15

16